




UK FASTENERS


PlasMASTER[®]

ENGINEERED FOR PERFECTION

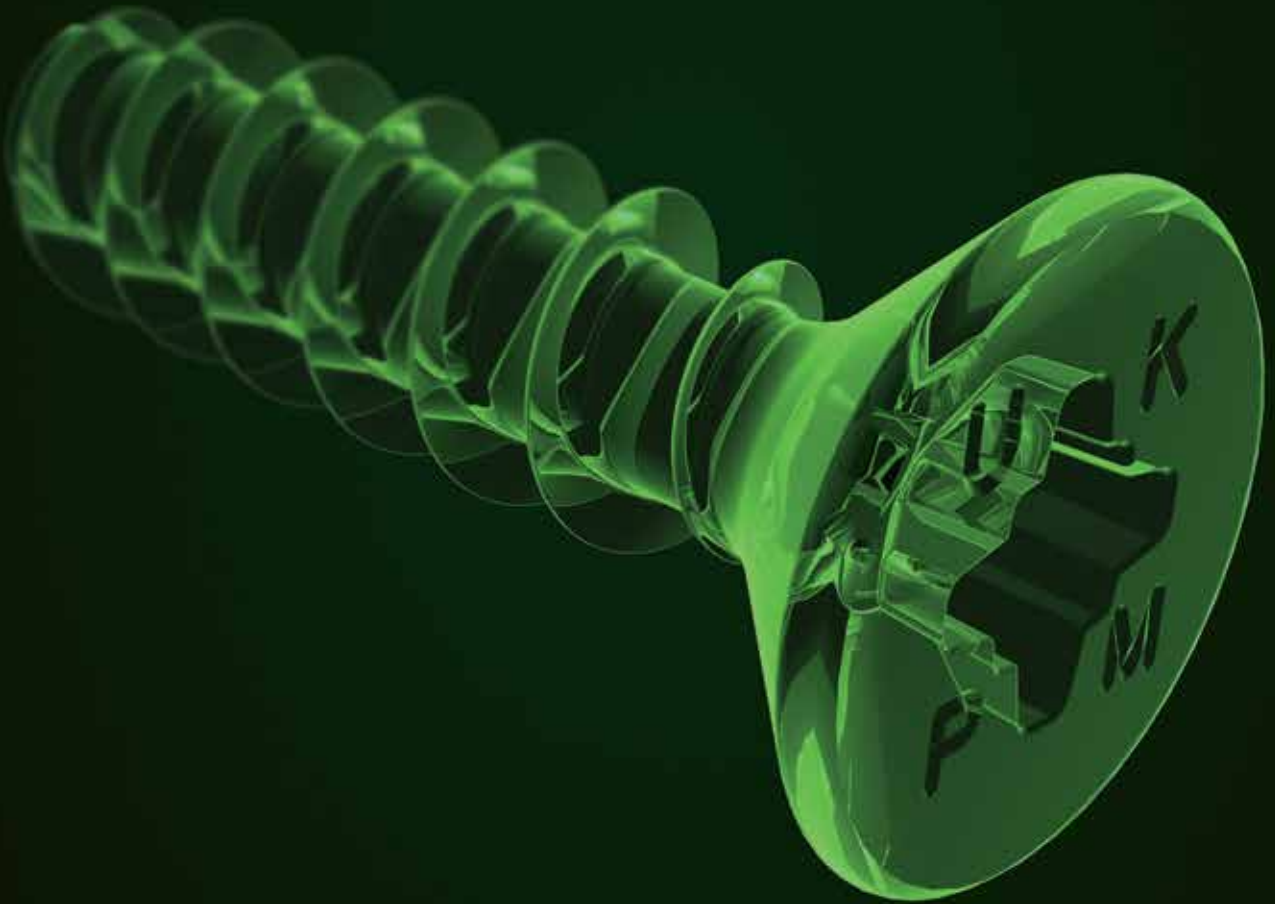

UK Fasteners part of Till & Whitehead Ltd

ON. NCE.

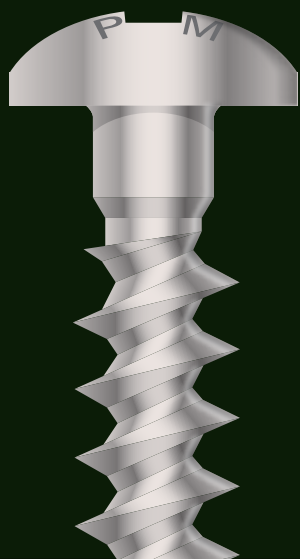

Designed for use in thermoplastics, the PlasMASTER® range is a quality, cost effective alternative to the market leading brands.

PRODUCT	UKF CODE	D = SCREW Ø (mm)	A = HEAD Ø (mm)	RECESS TYPE	LENGTHS (mm)									
					5	6	8	10	12	14	16	18	20	25

PAN TORX – (PM4) TORX PAN Head PlasMASTER® - 30 Degree - Bright Zinc Plated - Gleitmo Waxed

	PM4250/L	2.5	4.40	T-8	●	●	●	●	●	●	●	●	●	●	●
	PM4300/L	3.0	5.30	T-10	●	●	●	●	●	●	●	●	●	●	●
	PM4350/L	3.5	6.10	T-10	●	●	●	●	●	●	●	●	●	●	●
	PM4400/L	4.0	7.00	T-20	●	●	●	●	●	●	●	●	●	●	●
	PM4500/L	5.0	8.80	T-25	●	●	●	●	●	●	●	●	●	●	●
	PM4600/L	6.0	10.50	T-25	●	●	●	●	●	●	●	●	●	●	●

COUNTERSUNK POZI – (PM5) TORX CSK Head PlasMASTER® - 30 Degree - Bright Zinc Plated - Gleitmo Waxed

	PM5250/L	2.5	5.0	T-8	●	●	●	●	●	●	●	●	●	●	●
	PM5300/L	3.0	5.80	T-10	●	●	●	●	●	●	●	●	●	●	●
	PM5350/L	3.5	7.00	T-10	●	●	●	●	●	●	●	●	●	●	●
	PM5400/L	4.0	8.00	T-20	●	●	●	●	●	●	●	●	●	●	●
	PM5500/L	5.0	10.00	T-25	●	●	●	●	●	●	●	●	●	●	●
	PM5600/L	6.0	12.00	T-25	●	●	●	●	●	●	●	●	●	●	●

PERFORMANCE GUARANTEED

The combination of a 30 degree thread angle and profiled thread root produces a screw with low installation torque and high stripping torque. Fully ROHS compliant, the screws are Trivalent (Cr3) Zinc Plated, and to aid installation the screws are also Gleitmo waxed.

Every care is taken to ensure the product arrives to our customer on time and in perfect condition. So confident are we in the quality of our screws that they are clearly identified with the UK Fasteners head markings!


Contact us today to request samples and a quotation for any of the ranges indicated above.



GUIDE TO AVAILABILITY

● AVAILABLE FROM UK FASTENERS' EXTENSIVE STOCK
● AVAILABLE TO ORDER - CONTACT US FOR DETAILS

SUPERIOR DESIGN. DOWN TO THE LAST DETAIL.

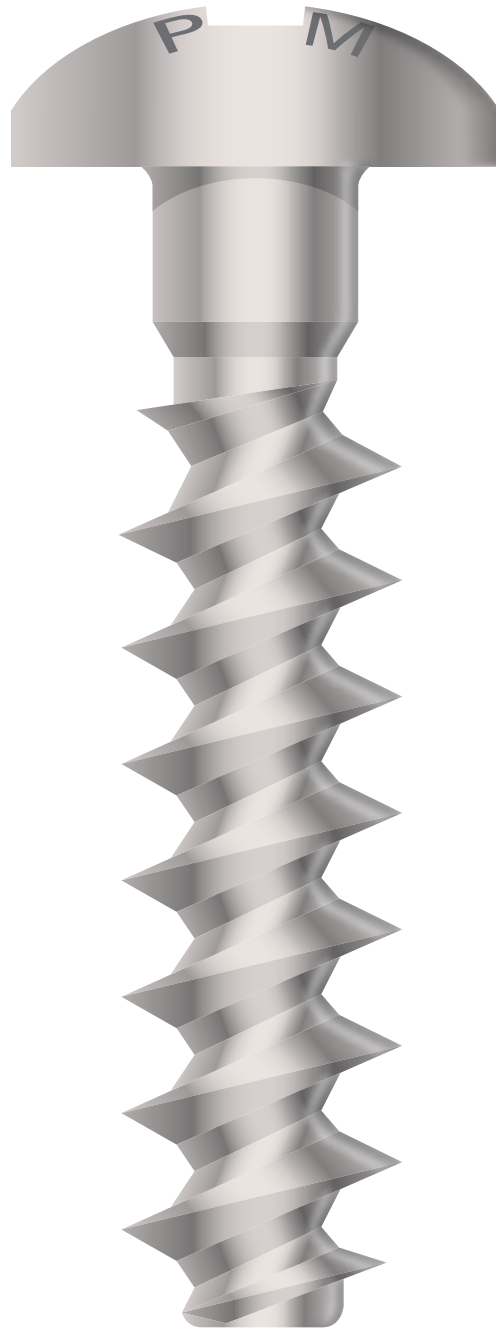

- Unique head marking to enable clear identification before and after installation.
- ROHS compliant Trivalent Zinc plating of 5 microns plus Gleitmo waxed to ease insertion.
- Manufactured from C1022 carbon steel and surface hardened to HV450, with a core hardness to a maximum of HV390.
- The combination of unique thread form and profiled thread root produces a screw with low installation torque and high stripping torque.
- One thread lead-in to aid installation.



UK FASTENERS



C1, Liddington Park, Leckhampton Road, Cheltenham, Gloucestershire GL53 0DL
Tel: 01242 577077 Fax: 01242 577078 Email: sales@ukfasteners.co.uk
Website: www.ukfasteners.co.uk

Reg Office: Bradley House, 66 Barrington Road, Altrincham WA14 1HY. Co Reg No. 46963

E&OE.