



UK FASTENERS

WindowMASTER®

QUALITY FASTENERS FOR WINDOWS, DOORS & CONSERVATORIES



UK Fasteners part of Till & Whitehead Ltd



UK FASTENERS

HEAD TYPES



COUNTERSUNK (CSK)

Designed to give a flush finish.




COUNTERSUNK (CSK) WITH RIBS

Designed to give a flush finish with added ribs under head to assist with countersinking directly into PVC.




SHALLOW PAN

A special head designed for use with friction stays/window hinges to assist with clamping and clearance. This shallow pan head has a locating collar under the head to aid a positive fit with the hardware.



FLANGE HEAD SHALLOW PAN

This product has all the features of the above shallow pan with the added benefit of the flange to increase the clamping area.




WAFER HEAD

Low profile head with a flat underside for applications where a large clamping area is required.



FULL PAN / ROUND HEAD

Head with a flat underside. Designed for application fixing against metal surfaces.




HEXAGON WASHER HEAD

Positive drive Hex Head with an integral washer to increase clamping effectiveness.



BUGLE HEAD

A curved surface under the head to prevent damage to the material.



SOCKET BUTTON HEAD

Designed for a raised finish with a flat underside to aid clamping.



SOCKET CAP HEAD

A flat underside to aid clamping. requires hex key to loosen or tighten.

DRIVE / RECESS STYLE



POZI / CROSS RECESS (PZ)

A very commonly used drive and standard recess for chipboard screws.



PHILLIPS RECESS (PH)

Standard recess for window screws.



SQ1/PH2 COMBI DRIVE

Available on a range of non magnetic stainless steel window screws to aid with a positive stick fit.



SQUARE RECESS / DRIVE

Square drive recess, not to be confused with combi drive.



PIN - TORX DRIVE

For security screws

THREAD TYPES



SELF-TAPPING THREAD

A common thread design mainly for use in steel or aluminum applications found mainly on self-tapping screws, also referred to as self-tappers.



TWIN THREAD

Also known as twin lead threads. They are designed to give a fast insertion time in soft material.



COARSE THREAD

A standard thread found on our self-drilling screws.



FINE THREAD

Also known as metric thread. Only found on self-drilling screws and for use with thicker steel reinforcing.



SERRATED THREAD

Reduces the torque required to install the fastener as well as assisting with the speed of insertion.



HI-LO THREAD

Hi-Lo threads are found on UKF's 3500 WindowMASTER screw as an alternative to single thread.

POINT STYLES



AB TYPE

For use in pre-drilled sheet material applications, standard on self-tapping screws, also referred to as self-tappers.



NEEDLE / GIMLET POINT

Designed for piercing timber, MDF, PVC and light gauge metal up to 0.6mm without pre-drilling. May also be referred to as sharp point.



B TYPE

For use in pre-drilled shallow holes.



SELF-DRILL TIP

For drilling into metals without the need for pre-drilling.



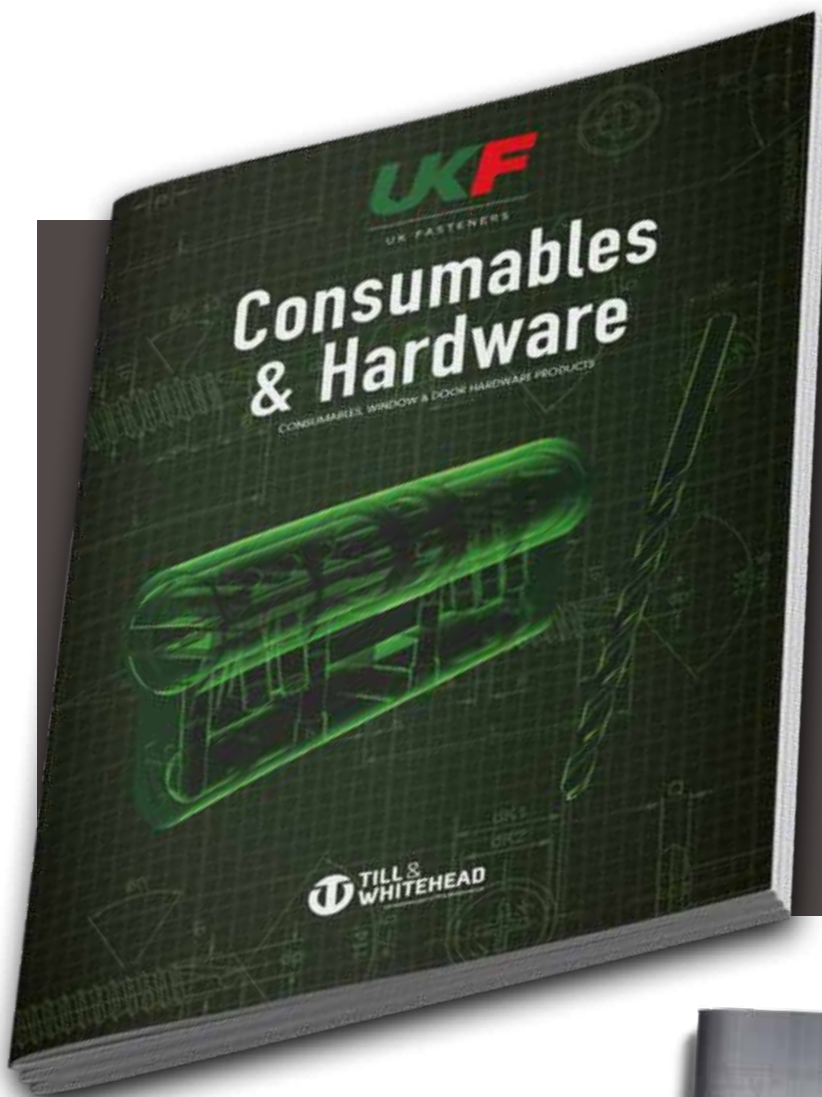
CUT 17 TYPE

Also known as slash point, they are used for fixing timber without the need to pre-drill. The cutting edge helps reduces splitting of the timber.



**TILL &
WHITEHEAD**

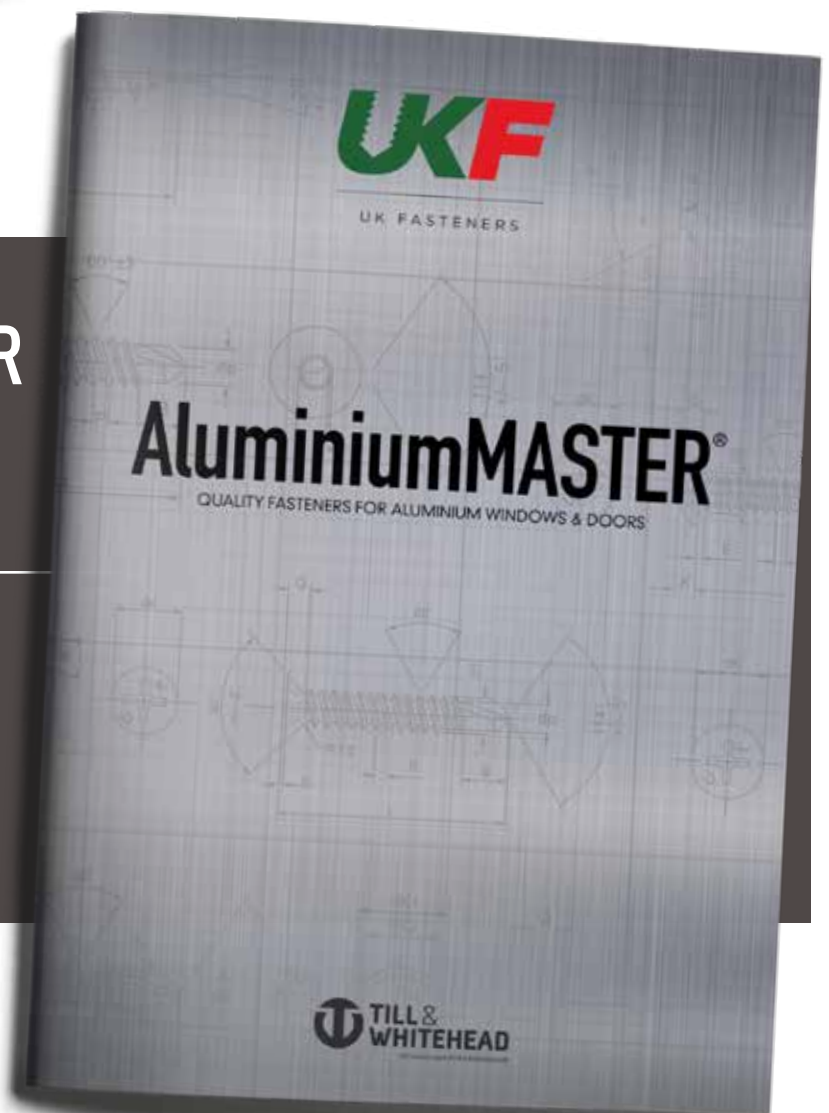
UK Fasteners part of Till & Whitehead Ltd



**PLEASE REQUEST
OUR CONSUMABLES
AND HARDWARE
CATALOGUE TO
REVIEW OUR
FULL RANGE**




**PLEASE REQUEST OUR
AluminiumMASTER
CATALOGUE**

**QUALITY FASTENERS
FOR ALUMINIUM
WINDOWS & DOORS**








STAINLESS STEEL RANGE – FABRICATION SCREWS



AUSTENITIC, COUNTERSUNK, GIMLET POINT, PVC ONLY UN-REINFORCED

| PRODUCT | UKF CODE | THREAD DIA (mm) | DRIVE TYPE | LENGTHS & BOX INFORMATION | | | | | | | |
|---|----------|-----------------|----------------------|---------------------------|-------|-------|------|------|------|------|------|
|  | 3504 | 4.3 | PH2 | BOX QTY | 16mm | 19mm | 25mm | 30mm | 38mm | 45mm | 55mm |
| | | | | INNER: | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 |
| | | | | OUTER: | 10000 | 10000 | 4000 | 4000 | 4000 | 4000 | 2000 |
|  | 3514 | 4.3 | SQ1/ PH2 Combi Drive | BOX QTY | 16mm | 19mm | 25mm | 30mm | 38mm | 45mm | 55mm |
| | | | | INNER: | 1000 | 1000 | 1000 | 1000 | 1000 | 500 | 500 |
| | | | | OUTER: | 10000 | 10000 | 8000 | 4000 | 4000 | 4000 | 2000 |
|  REPAIR SCREW | 3503 | 4.8 | PH2 | BOX QTY | 19mm | 25mm | 38mm | | | | |
| | | | | INNER: | 1000 | 1000 | 1000 | | | | |
| | | | | OUTER: | 8000 | 4000 | 4000 | | | | |

AUSTENITIC, SHALLOW PAN, GIMLET POINT, PVC ONLY UN-REINFORCED

| PRODUCT | UKF CODE | THREAD DIA (mm) | DRIVE TYPE | LENGTHS & BOX INFORMATION | | | | | | | |
|---|----------|-----------------|----------------------|---------------------------|-------|-------|------|------|------|--|--|
|  SHALLOW PAN HEAD | 3574 | 4.3 | PH2 | BOX QTY | 16mm | 19mm | 25mm | 31mm | | | |
| | | | | INNER: | 1000 | 1000 | 1000 | 1000 | | | |
| | | | | OUTER: | 10000 | 8000 | 4000 | 4000 | | | |
|  SHALLOW PAN WITH SERRATIONS UNDER HEAD | 3584 | 4.3 | SQ1/ PH2 Combi Drive | BOX QTY | 16mm | 19mm | 25mm | 31mm | | | |
| | | | | INNER: | 1000 | 1000 | 1000 | 1000 | | | |
| | | | | OUTER: | 8000 | 8000 | 4000 | 4000 | | | |
|  SHALLOW PAN WITH SERRATIONS UNDER HEAD | 3573 | 4.8 | PH2 | BOX QTY | 16mm | 20mm | | | | | |
| | | | | INNER: | 1000 | 1000 | | | | | |
| | | | | OUTER: | 8000 | 12000 | | | | | |
|  FLANGE HEAD SHALLOW PAN | 3575 | 4.8 | PH2 | BOX QTY | 13mm | 16mm | 19mm | 25mm | 31mm | | |
| | | | | INNER: | 1000 | 1000 | 1000 | 1000 | 1000 | | |
| | | | | OUTER: | 10000 | 10000 | 4000 | 4000 | 4000 | | |
|  SHALLOW PAN WITH SERRATIONS UNDER HEAD | 3585 | 4.8 | SQ1/ PH2 Combi Drive | BOX QTY | 25mm | | | | | | |
| | | | | INNER: | 1000 | | | | | | |
| | | | | OUTER: | 4000 | | | | | | |

AUSTENITIC ONE PIECE SELF DRILLING SCREWS, ONLY RECOMMENDED FOR ALUMINIUM

| PRODUCT | UKF CODE | THREAD DIA (mm) | DRIVE TYPE | LENGTHS & BOX INFORMATION | | | | | | | |
|---|----------|-----------------|------------|---------------------------|------|------|------|------|------|------|------|
|  | 3400 | 4.2 | PZ2 | BOX QTY | 16mm | 19mm | 25mm | 32mm | 38mm | 45mm | 50mm |
| | | | | INNER: | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 |
| | | | | OUTER: | | | | | | | |
|  SHALLOW PAN HEAD | 3000 | 4.8 | PH2 | BOX QTY | 16mm | 23mm | | | | | |
| | | | | INNER: | 1000 | 1000 | | | | | |
| | | | | OUTER: | 8000 | 4000 | | | | | |

CODE BUILDER





STAINLESS STEEL RANGE EXAMPLE

UKF CODE + LENGTH = CODE
3504 + 25 = 3504/25





sales@ukfasteners.co.uk
01242 577077

SPECIALISED STAINLESS STEEL RANGE – FABRICATION SCREWS



AUSTENITIC BI-METAL

| PRODUCT | UKF CODE | THREAD DIA (mm) | DRIVE TYPE | LENGTHS & BOX INFORMATION | | | | | | | |
|--|----------|-----------------|----------------------|---------------------------|-------|-------|-------|--------|------|------|------|
|  RIBBED COUNTERSUNK | R 4500 | 4.5 | PH2 | BOX QTY | 16mm | 19mm | 25mm | 29.5mm | 32mm | 38mm | |
| | | | | INNER: | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | |
| | | | | OUTER: | 12000 | 12000 | 6000 | 6000 | 6000 | 6000 | |
|  RIBBED COUNTERSUNK | QS 4500 | 4.5 | SQ1/ PH2 Combi Drive | BOX QTY | 16mm | 19mm | 25mm | 29.5mm | 32mm | 38mm | 45mm |
| | | | | INNER: | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 500 |
| | | | | OUTER: | 12000 | 12000 | 6000 | 6000 | 6000 | 6000 | 3000 |
|  SHALLOW PAN HEAD WITH SERRATIONS UNDER HEAD | R 4300 | 4.5 | PH2 | BOX QTY | 16mm | 19mm | 25mm | 29.5mm | | | |
| | | | | INNER: | 1000 | 1000 | 1000 | 1000 | | | |
| | | | | OUTER: | 12000 | 12000 | 6000 | 6000 | | | |
|  SHALLOW PAN HEAD WITH SERRATIONS UNDER HEAD | QS 4300 | 4.5 | SQ1/ PH2 Combi Drive | BOX QTY | 16mm | 19mm | 25mm | 29.5mm | | | |
| | | | | INNER: | 1000 | 1000 | 1000 | 1000 | | | |
| | | | | OUTER: | 12000 | 12000 | 12000 | 6000 | | | |

MRX MODIFIED MARTENSITIC

| PRODUCT | UKF CODE | THREAD DIA (mm) | DRIVE TYPE | LENGTHS & BOX INFORMATION | | | | | | | |
|--|----------|-----------------|------------|---------------------------|-------|-------|-------|-------|------|------|--|
|  | 6000 | 3.9 | PH2 | BOX QTY | 13mm | 16mm | 19mm | 25mm | 32mm | 38mm | |
| | | | | INNER: | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | |
| | | | | OUTER: | 12000 | 12000 | 12000 | 8000 | 7000 | 7000 | |
|  RIBBED COUNTERSUNK | 6200 | 3.9 | PH2 | BOX QTY | 16mm | | | | | | |
| | | | | INNER: | 1000 | | | | | | |
| | | | | OUTER: | 12000 | | | | | | |
|  SHALLOW PAN HEAD | 5300 | 4.2 | PH2 | BOX QTY | 13mm | 16mm | 19mm | 25mm | 28mm | | |
| | | | | INNER: | 1000 | 1000 | 1000 | 1000 | 1000 | | |
| | | | | OUTER: | 12000 | 12000 | 10000 | 10000 | 6000 | | |
|  SHALLOW FLANGE PAN HEAD | 5000 | 4.8 | PH2 | BOX QTY | 16mm | 25mm | | | | | |
| | | | | INNER: | 1000 | 1000 | | | | | |
| | | | | OUTER: | 10000 | 5000 | | | | | |

410 MARTENSITIC, DACROTISED SILVER 1000

| PRODUCT | UKF CODE | THREAD DIA (mm) | DRIVE TYPE | LENGTHS & BOX INFORMATION | | | | | | | |
|---|----------|-----------------|------------|---------------------------|-------|-------|------|------|------|--|--|
|  | 4100 | 3.9 | PH2 | BOX QTY | 16mm | 19mm | 25mm | 32mm | 38mm | | |
| | | | | INNER: | 1000 | 1000 | 1000 | 1000 | 1000 | | |
| | | | | OUTER: | 12000 | 12000 | 4000 | 4000 | 4000 | | |
|  SHALLOW PAN HEAD | 4000 | 4.3 | PH2 | BOX QTY | 16mm | 19mm | 25mm | 28mm | | | |
| | | | | INNER: | 1000 | 1000 | 1000 | 1000 | | | |
| | | | | OUTER: | 10000 | 8000 | 4000 | 4000 | | | |

AS OUR SCREWS ARE DESIGNED TO SUIT OUR DRIVER BITS, WE STRONGLY RECOMMEND THAT TO ENSURE THE BEST FIT, THESE ARE ALSO PURCHASED FROM UKF

CODE BUILDER

STAINLESS STEEL RANGE EXAMPLE

UKF CODE + LENGTH = CODE
3504 + 25 = 3504/25







sales@ukfasteners.co.uk
01242 577077

CARBON STEEL FABRICATION SCREWS - COUNTERSUNK

COUNTERSUNK GIMLET POINT (PVC ONLY UN-REINFORCED)

| PRODUCT | UKF CODE | THREAD DIA (mm) | DRIVE TYPE | LENGTHS & BOX INFORMATION | | | | | | | | | | | |
|---|----------|-----------------|------------|---------------------------|-------|-------|-------|-------|------|------|------|------|------|------|------|
|  HI-LO THREAD | 3500 | 4.3 | PH2 | BOX QTY | 16mm | 19mm | 22mm | 25mm | 32mm | 38mm | 45mm | 55mm | 65mm | | |
| | | | | INNER: | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 500 | 500 | 500 | | |
| | | | | OUTER: | 12000 | 12000 | 12000 | 12000 | 6000 | 6000 | 3000 | 3000 | 3000 | | |
|  SINGLE THREAD | 3501 | 4.3 | PH2 | BOX QTY | 16mm | 19mm | 22mm | 25mm | 28mm | 30mm | 32mm | 35mm | 38mm | 40mm | 45mm |
| | | | | INNER: | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 500 | 500 |
| | | | | OUTER: | 12000 | 12000 | 12000 | 12000 | 6000 | 6000 | 6000 | 6000 | 6000 | 3000 | 3000 |
|  HI-LO THREAD REPAIR SCREW | 3515 | 4.8 | PH2 | BOX QTY | 25mm | 38mm | | | | | | | | | |
| | | | | INNER: | 1000 | 1000 | | | | | | | | | |
| | | | | OUTER: | 12000 | 6000 | | | | | | | | | |
|  SINGLE THREAD REPAIR SCREW | 3516 | 4.8 | PH2 | BOX QTY | 25mm | 38mm | | | | | | | | | |
| | | | | INNER: | 1000 | 1000 | | | | | | | | | |
| | | | | OUTER: | 12000 | 6000 | | | | | | | | | |
|  HEAD DIAMETER 9.5MM | 3542 | 4.8 | PH2 | BOX QTY | 45mm | | | | | | | | | | |
| | | | | INNER: | 500 | | | | | | | | | | |
| | | | | OUTER: | 3000 | | | | | | | | | | |

COUNTERSUNK SELF DRILLING (REINFORCED)

| PRODUCT | UKF CODE | THREAD DIA (mm) | DRIVE TYPE | LENGTHS & BOX INFORMATION | | | | | | | | | | | |
|---|----------|-----------------|------------|---------------------------|-------|-------|-------|-------|-------|------|------|------|------|------|--|
|  RIBBED COUNTERSUNK / REINFORCING RETENTION / PINNING | 3530 | 3.9 | PH2 | BOX QTY | 13mm | 16mm | 19mm | | | | | | | | |
| | | | | INNER: | 1000 | 1000 | 1000 | | | | | | | | |
| | | | | OUTER: | 12000 | 12000 | 12000 | | | | | | | | |
|  FINE THREAD | 3555 | 4.0 | PH2 | BOX QTY | 16mm | 19mm | 22mm | 25mm | 28mm | 32mm | 38mm | 45mm | | | |
| | | | | INNER: | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 500 | | | |
| | | | | OUTER: | 12000 | 12000 | 12000 | 12000 | 12000 | 6000 | 6000 | 3000 | | | |
|  RIBBED COUNTERSUNK / REINFORCING RETENTION PINNING / FINE THREAD | 3560 | 4.0 | PH2 | BOX QTY | 11mm | 14mm | 16mm | 19mm | | | | | | | |
| | | | | INNER: | 1000 | 1000 | 1000 | 1000 | | | | | | | |
| | | | | OUTER: | 12000 | 12000 | 12000 | 12000 | | | | | | | |
|  COUNTERSUNK SELF DRILLING REINFORCING SCREW | 3525 | 3.9 | PH2 | BOX QTY | 13mm | 16mm | 19mm | 22mm | 25mm | 28mm | 32mm | 38mm | 45mm | 55mm | |
| | | | | INNER: | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 500 | 500 | |
| | | | | OUTER: | 12000 | 12000 | 12000 | 12000 | 12000 | 6000 | 6000 | 6000 | 3000 | 3000 | |
|  HEAD DIAMETER 8MM | 3526 | 4.2 | PH2 | BOX QTY | 45mm | | | | | | | | | | |
| | | | | INNER: | 500 | | | | | | | | | | |
| | | | | OUTER: | 3000 | | | | | | | | | | |
|  HEAD DIAMETER 9.5MM | 3540 | 4.8 | PH2 | BOX QTY | 25mm | 32mm | 38mm | 45mm | 50mm | 70mm | | | | | |
| | | | | INNER: | 1000 | 500 | 500 | 500 | 500 | 200 | | | | | |
| | | | | OUTER: | 6000 | 3000 | 3000 | 3000 | 3000 | 1200 | | | | | |

CODE BUILDER

CARBON STEEL RANGE EXAMPLE






UKF CODE + LENGTH = CODE
3501 + 25 = 3501/25Z

Z = ZINC
D = DACROTISED
Y = YELLOW






sales@ukfasteners.co.uk
01242 577077

SHALLOW PAN / FLANGE HEAD

SHALLOW PAN HEAD GIMLET POINT (PVC ONLY UN-REINFORCED)

| PRODUCT | UKF CODE | THREAD DIA (mm) | DRIVE TYPE | LENGTHS & BOX INFORMATION | | | | | | | | | | |
|---|----------|-----------------|------------|---------------------------|-------|-------|-------|------|------|--|--|--|--|--|
|  FLANGE HEAD SHALLOW PAN | 3576 | 4.8 | PH2 | BOX QTY | 16mm | 19mm | 25mm | 31mm | | | | | | |
| | | | | INNER: | 1000 | 1000 | 1000 | 1000 | | | | | | |
| | | | | OUTER: | 12000 | 12000 | 6000 | 6000 | | | | | | |
|  SHALLOW PAN HEAD | 3577 | 4.3 | PH2 | BOX QTY | 13mm | 16mm | 19mm | 25mm | 31mm | | | | | |
| | | | | INNER: | 1000 | 1000 | 1000 | 1000 | 1000 | | | | | |
| | | | | OUTER: | 12000 | 12000 | 12000 | 6000 | 6000 | | | | | |
|  SUPER SHALLOW PAN 9MM HEAD DIAMETER | 3581 | 4.8 | PH2 | BOX QTY | 19mm | 25mm | | | | | | | | |
| | | | | INNER: | 1000 | 1000 | | | | | | | | |
| | | | | OUTER: | 12000 | 6000 | | | | | | | | |
|  SUPER SHALLOW PAN 8MM HEAD DIAMETER | 3581 | 4.8 | PH2 | BOX QTY | 25mm | | | | | | | | | |
| | | | | INNER: | 1000 | | | | | | | | | |
| | | | | OUTER: | 6000 | | | | | | | | | |
|  SUPER SHALLOW PAN 9MM HEAD DIAMETER SECURITY SCREW | 3583 | 4.8 | T20 | BOX QTY | 25mm | | | | | | | | | |
| | | | | INNER: | 1000 | | | | | | | | | |
| | | | | OUTER: | 6000 | | | | | | | | | |

SHALLOW PAN HEAD SELF DRILLING (REINFORCED)

| PRODUCT | UKF CODE | THREAD DIA (mm) | DRIVE TYPE | LENGTHS & BOX INFORMATION | | | | | | | | | | |
|--|----------|-----------------|------------|---------------------------|-------|-------|-------|------|------|--|--|--|--|--|
|  MEDIUM HEIGHT PAN HEAD | 3520 | 3.9 | PH2 | BOX QTY | 16mm | 19mm | | | | | | | | |
| | | | | INNER: | 1000 | 1000 | | | | | | | | |
| | | | | OUTER: | 12000 | 12000 | | | | | | | | |
|  FLANGE HEAD SHALLOW PAN | 3578 | 4.8 | PH2 | BOX QTY | 16mm | 19mm | 25mm | | | | | | | |
| | | | | INNER: | 1000 | 1000 | 1000 | | | | | | | |
| | | | | OUTER: | 12000 | 12000 | 6000 | | | | | | | |
|  SHALLOW PAN HEAD | 3579 | 4.3 | PH2 | BOX QTY | 13mm | 16mm | 19mm | 25mm | 28mm | | | | | |
| | | | | INNER: | 1000 | 1000 | 1000 | 1000 | 1000 | | | | | |
| | | | | OUTER: | 12000 | 12000 | 12000 | 6000 | 6000 | | | | | |
|  SHALLOW PAN HEAD / FINE THREAD | 3580 | M4 | PH2 | BOX QTY | 16mm | 28mm | | | | | | | | |
| | | | | INNER: | 1000 | 1000 | | | | | | | | |
| | | | | OUTER: | 12000 | 6000 | | | | | | | | |
|  SUPER SHALLOW PAN 9MM HEAD DIAMETER | 3582 | 4.8 | PH2 | BOX QTY | 19mm | 25mm | | | | | | | | |
| | | | | INNER: | 1000 | 1000 | | | | | | | | |
| | | | | OUTER: | 12000 | 6000 | | | | | | | | |

CODE BUILDER

CARBON STEEL RANGE EXAMPLE


UKF CODE + LENGTH = CODE
 3501 + 25 = 3501/25Z

Z = ZINC
 D = DACROTISED


sales@ukfasteners.co.uk
 01242 577077

CARBON STEEL RANGE


3590 – BAYPOLE / MECHANICAL JOINTING SCREW

| PRODUCT | UKF CODE | THREAD DIA (mm) | DRIVE TYPE | LENGTHS & BOX INFORMATION | | | | | | | | | | |
|---|----------|-----------------|------------|---------------------------|------|------|------|------|------|-------|--|--|--|--|
|  | 3590 | 4.8 | PH2 | BOX QTY | 50mm | 60mm | 70mm | 80mm | 90mm | 100mm | | | | |
| | | | | INNER: | 200 | 200 | 200 | 200 | 100 | 100 | | | | |
| | | | | OUTER: | 2400 | 1600 | 1600 | 1600 | 800 | 800 | | | | |




3551 – MECHANICAL JOINTING SCREW

| PRODUCT | UKF CODE | THREAD DIA (mm) | DRIVE TYPE | LENGTHS & BOX INFORMATION | | | | | | | | | | |
|---|----------|-----------------|------------|---------------------------|------|------|------|------|--|--|--|--|--|--|
|  | 3551 | 4.2 | PH2 | BOX QTY | 50mm | 55mm | 65mm | 75mm | | | | | | |
| | | | | INNER: | 500 | 500 | 200 | 200 | | | | | | |
| | | | | OUTER: | 3000 | 3000 | 2400 | 2400 | | | | | | |


3570 – JOINING FRAME TO TRANSOM / MULLION

| PRODUCT | UKF CODE | THREAD DIA (mm) | DRIVE TYPE | LENGTHS & BOX INFORMATION | | | | | | | | | | |
|---|----------|-----------------|------------|---------------------------|------|------|------|------|--|--|--|--|--|--|
|  | 3570 | 4.8 | PH2 | BOX QTY | 55mm | 65mm | 80mm | 95mm | | | | | | |
| | | | | INNER: | 200 | 200 | 100 | 100 | | | | | | |
| | | | | OUTER: | 2400 | 2400 | 1200 | 1200 | | | | | | |



DRIP RAIL – WEATHER BAR SCREWS – NIPPLE HEAD

| PRODUCT | UKF CODE | THREAD DIA (mm) | DRIVE TYPE | LENGTHS & BOX INFORMATION | | | | | | | | | | |
|---|----------|-----------------|------------|---------------------------|------|--|--|--|--|--|--|--|--|--|
|  HEAD DIAMETER 10.4MM / SELF DRILLING | 3595 | 4.0 | PH2 | BOX QTY | 13mm | | | | | | | | | |
| | | | | INNER: | 1000 | | | | | | | | | |
| | | | | OUTER: | 6000 | | | | | | | | | |
|  HEAD DIAMETER 10MM | 3594 | 4.0 | PH2 | BOX QTY | 12mm | | | | | | | | | |
| | | | | INNER: | 1000 | | | | | | | | | |
| | | | | OUTER: | 6000 | | | | | | | | | |
|  HEAD DIAMETER 9MM | 3594 | 4.0 | PH2 | BOX QTY | 12mm | | | | | | | | | |
| | | | | INNER: | 1000 | | | | | | | | | |
| | | | | OUTER: | 6000 | | | | | | | | | |

3588 – GLAZING CASSETTE SCREW

| PRODUCT | UKF CODE | THREAD DIA (mm) | DRIVE TYPE | LENGTHS & BOX INFORMATION | | | | | | | | | | |
|---|----------|-----------------|------------|---------------------------|------|--|--|--|--|--|--|--|--|--|
|  | 3588 | 4.3 | PH2 | BOX QTY | 38mm | | | | | | | | | |
| | | | | INNER: | 500 | | | | | | | | | |
| | | | | OUTER: | 3000 | | | | | | | | | |

HANDLE SCREWS – AVAILABLE IN CARBON STEEL AND STAINLESS STEEL

| PRODUCT | UKF CODE | THREAD DIA (mm) | DRIVE TYPE | LENGTHS & BOX INFORMATION | | | | | | | | | | |
|--|----------|-----------------|------------|---------------------------|------|------|------|------|------|------|------|------|------|------|
|  CARBON STEEL | M5 | M5 | PH2 | BOX QTY | 10mm | 12mm | 14mm | 16mm | 20mm | 25mm | 30mm | 35mm | 40mm | 50mm |
| | | | | INNER: | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 500 |
|  STAINLESS STEEL | M5 | M5 | PZ2 | BOX QTY | 12mm | 14mm | 16mm | 20mm | 25mm | 30mm | 35mm | 40mm | 50mm | |
| | | | | INNER: | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 500 | |

CODE BUILDER



CODE EXAMPLE

UKF CODE + LENGTH = CODE
3590 + 80 = 3590/80Z


sales@ukfasteners.co.uk
01242 577077

INSTALLATION FIXINGS

DIRECT FIX CONCRETE SCREWS

| PRODUCT | UKF CODE | THREAD DIA (MM) | DRIVE TYPE | LENGTHS & BOX INFORMATION | | | | | | | | | | | | | |
|--|----------|-----------------|------------|---------------------------|------|------|------|-------|------|-------|-------|-------|-------|-------|-------|-------|--|
|  | 9000 | 7.5 | T30 | BOX QTY | 52mm | 62mm | 72mm | 82mm | 92mm | 102mm | 112mm | 122mm | 132mm | 142mm | 152mm | 182mm | |
| | | | | INNER: | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | |
| | | | | OUTER: | 1000 | 1000 | 1000 | 1000 | 800 | 800 | 600 | 600 | 600 | 600 | 600 | 400 | |
|  9200 SALT SPRAY TESTED TO 500 HOURS | 9200 | 4.5 | PH2 | BOX QTY | 57mm | 70mm | 82mm | 100mm | | | | | | | | | |
| | | | | INNER: | 100 | 100 | 100 | 100 | | | | | | | | | |
| | | | | OUTER: | 2400 | 2000 | 2000 | 1200 | | | | | | | | | |

HEAVY DUTY SELF DRILLING SCREW

| PRODUCT | UKF CODE | THREAD DIA (mm) | DRIVE TYPE | LENGTHS & BOX INFORMATION | | | | | | | | | | | |
|---|----------|-----------------|------------|---------------------------|------|--|--|--|--|--|--|--|--|--|--|
|  | 3543 | 5.5 | PH3 | BOX QTY | 50mm | | | | | | | | | | |
| | | | | INNER: | 200 | | | | | | | | | | |
| | | | | OUTER: | 2400 | | | | | | | | | | |

NYLON FRAME ANCHORS

| PRODUCT | UKF CODE | THREAD DIA (mm) | DRIVE TYPE | LENGTHS & BOX INFORMATION | | | | | | | | | | | | | |
|---------|----------|-----------------|------------|---------------------------|--|--|--|--|--|--|--|--|--|--|--|--|--|
|---------|----------|-----------------|------------|---------------------------|--|--|--|--|--|--|--|--|--|--|--|--|--|

NYLON FRAME FIXING - SCREW IN TYPE

| | | | | | | | | | | | | | | | | |
|--|------|-----|-----|---------|-------|--|--|--|--|--|--|--|--|--|--|--|
|  | 7000 | 8.0 | PZ3 | BOX QTY | 100mm | | | | | | | | | | | |
| | | | | INNER: | 100 | | | | | | | | | | | |
| | | | | OUTER: | | | | | | | | | | | | |




NYLON FRAME FIXING - HAMMER IN TYPE

| | | | | | | | | | | | | | | | | |
|---|------|-----|-----|---------|------|------|--|--|--|--|--|--|--|--|--|--|
|  | 7100 | 8.0 | PZ3 | BOX QTY | 60mm | 80mm | | | | | | | | | | |
| | | | | INNER: | 100 | 100 | | | | | | | | | | |
| | | | | OUTER: | | | | | | | | | | | | |

NYLON FRAME ANCHOR (2 PIECE)

| | | | | | | | | | | | | | | | | |
|---|------|-----|-----|---------|-------|-------|-------|--|--|--|--|--|--|--|--|--|
|  | 7200 | 8.0 | PZ3 | BOX QTY | 100mm | 120mm | 140mm | | | | | | | | | |
| | | | | INNER: | 100 | 100 | 100 | | | | | | | | | |
| | | | | OUTER: | | | | | | | | | | | | |

PLASTIC HEADED NAIL & PIN RANGE (BLACK / WHITE / TAN / BROWN / STAINLESS)

| PRODUCT | UKF CODE | THREAD DIA (mm) | LENGTHS & BOX INFORMATION | | | | | | | | | | | | | |
|---|---------------------|-----------------|---------------------------|------|------|------|--|--|--|--|--|--|--|--|--|--|
|  | CAPPING PIN | 2.0 | BOX QTY | 30mm | | | | | | | | | | | | |
| | | | INNER: | 250 | | | | | | | | | | | | |
|  | PLASTIC HEADED PIN | 2.0 | BOX QTY | 25mm | 30mm | 40mm | | | | | | | | | | |
| | | | INNER: | 250 | 250 | 250 | | | | | | | | | | |
|  | PLASTIC HEADED NAIL | 3.35 | BOX QTY | 40mm | 50mm | 65mm | | | | | | | | | | |
| | | | INNER: | 100 | 100 | 100 | | | | | | | | | | |


CODE BUILDER

CODE EXAMPLE

UKF CODE + LENGTH = CODE
3590 + 80 = 3590/80Z

sales@ukfasteners.co.uk
01242 577077

GRIPTIGHT PLUS® MULTI PURPOSE SCREW

| PRODUCT | UKF CODE | DESCRIPTION | LENGTH & FINISHES AVAILABLE |
|---|----------------|---|--|
|  | GRIPTIGHT PLUS | HARDENED STEEL STEEL POZI CSK OR ROUND HEAD MULTI PURPOSE SCREW | 3.0MM TO 6.0MM DIA. & IN LENGTHS FROM 12MM TO 150MM |

ALSO AVAILABLE IN A2 STAINLESS STEEL

GRIPTIGHT PLUS SCREWS ARE MANUFACTURED FROM HIGH QUALITY CARBON STEEL, WHICH IS THEN HEAT TREATED TO GIVE EXCEPTIONAL TOUGHNESS FROM HEAD TO POINT. PROTECTIVE FINISH IN ZINC & ZINC/YELLOW WAXED TO AID INSTALLATION SPEED.

| DIAMETER | | LENGTH | | HEAD STYLE | | PACK INFO | | DIAMETER | | LENGTH | | HEAD STYLE | | PACK INFO | |
|----------|-------|--------|--------|------------|-----|-----------|-------|----------|-------|--------|--------|------------|-----|-----------|-------|
| MM | GAUGE | MM | INCH | CSK | RND | INNER | OUTER | MM | GAUGE | MM | INCH | CSK | RND | INNER | OUTER |
| 3 | NO.4 | 12 | 1/2" | • | • | 1000 | 60000 | 4.5 | NO.10 | 25 | 1" | • | | 500 | 6000 |
| | | 15 | 5/8" | • | • | 1000 | 40000 | | | 30 | 1.1/4" | • | • | 500 | 6000 |
| | | 16 | 5/8" | • | | 1000 | 40000 | | | 35 | 1.3/8" | • | | 500 | 6000 |
| | | 20 | 3/4" | • | | 1000 | 34000 | | | 40 | 1.1/2" | • | | 500 | 6000 |
| | | 30 | 1.1/4" | • | | 1000 | 22000 | | | 45 | 1.3/4" | • | | 500 | 5000 |
| 3.5 | NO.6 | 12 | 1/2" | • | | 500 | 32000 | | | 50 | 2" | • | | 500 | 5000 |
| | | 15 | 5/8" | • | • | 500 | 30000 | | | 60 | 2.3/8" | • | | 200 | 2400 |
| | | 16 | 5/8" | • | | 500 | 30000 | | | 70 | 2.3/4" | • | | 200 | 2400 |
| | | 17 | 5/8" | • | | 500 | 30000 | | | 80 | 3.1/8" | • | | 200 | 2000 |
| | | 20 | 3/4" | • | | 500 | 30000 | 5 | NO.12 | 25 | 1" | • | | 500 | 6000 |
| | | 25 | 1" | • | • | 500 | 17000 | | | 30 | 1.1/4" | • | • | 500 | 6000 |
| | | 30 | 1.1/4" | • | • | 500 | 11000 | | | 35 | 1.3/8" | • | • | 500 | 6000 |
| | | 35 | 1.3/8" | • | • | 500 | 11000 | | | 40 | 1.1/2" | • | • | 500 | 5000 |
| | | 40 | 1.1/2" | • | | 500 | 6000 | | | 45 | 1.3/4" | • | | 500 | 3000 |
| | | 45 | 1.3/4" | • | | 500 | 6000 | | | 50 | 2" | • | | 500 | 3000 |
| | | 50 | 2" | • | | 500 | 6000 | | | 60 | 2.3/8" | • | | 200 | 3000 |
| | | | | | | | | | | 70 | 2.3/4" | • | | 200 | 2000 |
| | | | | | | | | | | 80 | 3.1/8" | • | | 200 | 2000 |
| | | | | | | | | | | 90 | 3.1/2" | • | | 200 | 2000 |
| 4 | NO.8 | 15 | 5/8" | • | • | 500 | 20000 | 6 | NO.14 | 100 | 4" | • | | 200 | 2000 |
| | | 20 | 3/4" | • | | 500 | 20000 | | | 120 | 4.3/4" | • | | 200 | 1000 |
| | | 25 | 1" | • | • | 500 | 17000 | | | 40 | 1.1/2" | • | | 200 | 2000 |
| | | 28 | 1.1/8" | • | | 500 | 11000 | | | 50 | 2" | • | | 200 | 3000 |
| | | 30 | 1.1/4" | • | | 500 | 11000 | | | 60 | 2.3/8" | • | | 200 | 2000 |
| | | 35 | 1.3/8" | • | | 500 | 11000 | | | 80 | 3.1/8" | • | | 200 | 2000 |
| | | 40 | 1.1/2" | • | • | 500 | 6000 | | | 90 | 3.1/2" | • | | 200 | 2000 |
| | | 45 | 1.3/4" | • | | 500 | 6000 | | | 100 | 4" | • | • | 200 | 2000 |
| | | 50 | 2" | • | • | 500 | 5000 | | | 120 | 4.3/4" | • | | 200 | 600 |
| | | 55 | 2.1/4" | • | | 500 | 3000 | | | 130 | 5.1/4" | • | | 200 | 600 |
| | | 60 | 2.3/8" | • | | 500 | 3000 | | | 150 | 6" | • | | 200 | 600 |
| | | 70 | 2.3/4" | • | | 500 | 2500 | | | | | | | | |
| | | | | | | | | | | | | | | | |

THREAD LENGTH:

AS STANDARD ALL DIAMETERS UP TO AND INCLUDING 50MM LONG ARE FULL THREADED.
ALL OTHERS ARE PART THREADED.

FULLY THREADED OPTIONS:

FULL THREADED LONGER LENGTH OPTIONS ALSO AVAILABLE FROM STOCK.



**PLEASE RETURN THIS COMPLETED APPLICATION FORM AND WE WILL OPEN YOUR ACCOUNT
WITHIN TWO WORKING DAYS: EMAIL TO SALES@UKFASTENERS.CO.UK OR POST/FAX**

UK Fasteners — Established 1983
Sterling House
Moreton Road
Longborough
Morton-in-Marsh
Gloucestershire
GL56 0QJ

(Part of Till & Whitehead Ltd Est 1876)
Tel: 01242 577077



APPLICATION TO OPEN A CREDIT ACCOUNT

| | | |
|---|--|---|
| Company Name: | | |
| Address: | | Head Office Address (Where applicable): |
| | | |
| | | |
| | | |
| | | |
| Telephone: | | Company Reg. No: |
| Fax: | | VAT No: |
| Please describe your business activity: | | |
| When was your business established: | | Email Address: |
| MD / Proprietors name(s): | | |
| Purchaser / buyer contact: | | Accounts dept. contact: |
| Please estimate your projected purchases with us for the next 12 months: | | £ |
| Amount of credit requested: | | £ |
| Trade References (Please supply two): | | |
| Name: | | Name: |
| Address: | | Address: |
| | | |
| | | |
| | | |
| Telephone: | | Telephone: |
| Please sign this application and acknowledge your agreement to our terms of trade - 30 days net monthly account. Title of goods is retained until payment has been made in full | | |
| Authorised Signature: | | Date: |
| Print Name: | | Position: |
| FOR UKF USE : EXTERNAL SALES REPRESENTATIVE | | |

