



PlasMASTER®



UK Fasteners
Part of Till & Whitehead Ltd

Engineered For Perfection

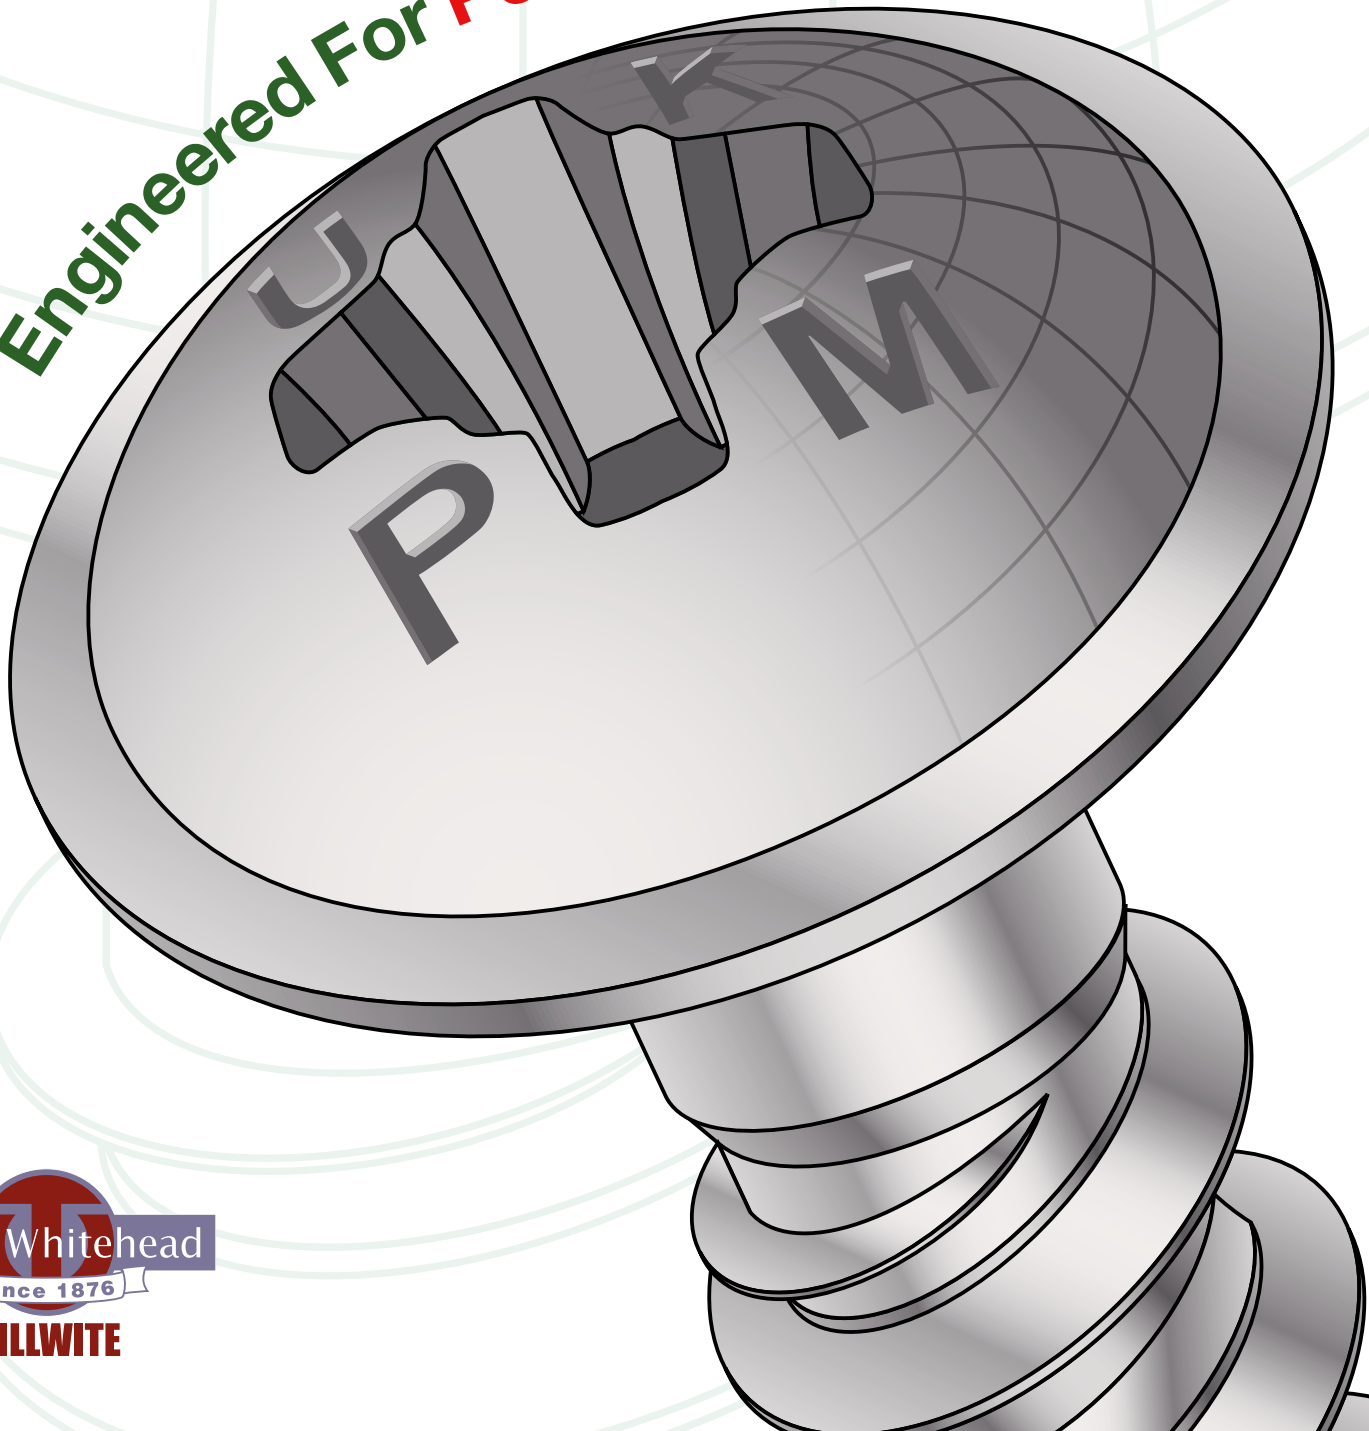


PlasMASTER® is the latest addition to UK Fasteners extensive specialised product portfolio. Designed for use in thermoplastics the PlasMASTER® screw is a realistic & cost effective alternative to the current market leading products.

We have over 25 years of success supplying industrial fasteners and components to a diverse range of companies throughout the UK including Shower manufacturers, Window and Door fabrication and furniture makers to name a few so you can feel confident that our experience ensures your expectations will be met. If required we can also create stock managed systems for you with well trained and experienced staff to offer guidance and help throughout any implementation.


**ENGINEERED WITH PRECISION,
DESIGNED FOR PERFORMANCE,
GUARANTEED TO DELIVER**



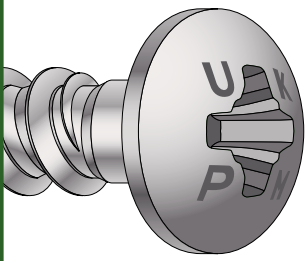


PAN POZI

(PM1) POZI PAN Head PlasMASTER® -
30 Degree - Bright Zinc Plated - Gleitmo Waxed




D = Screw ϕ (mm)	2.5	3.0	3.5	4.0	5.0	6.0	
A = Head ϕ (mm)	4.40	5.30	6.10	7.00	8.80	10.50	
Recess Type	PZ-1	PZ-1	PZ-2	PZ-2	PZ-2	PZ-3	
UKF Code	PM1250/L	PM1300/L	PM1350/L	PM1400/L	PM1500/L	PM1600/L	
L = Length (mm)	5						
	6	•	•				
	8	•	•	•	•		
	10	•	•	•	•	•	
	12	•	•	•	•	•	•
	14			•	•		
	16		•	•	•	•	•
	18					•	
	20				•	•	•
	25						
	30						

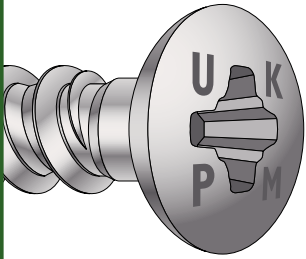


COUNTERSUNK POZI

(PM2) POZI CSK Head PlasMASTER® -
30 Degree - Bright Zinc Plated - Gleitmo Waxed

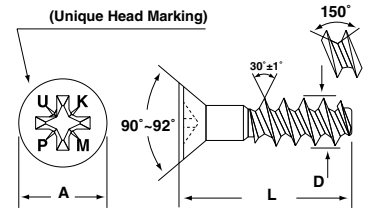


D = Screw ϕ (mm)	2.5	3.0	3.5	4.0	5.0	6.0	
A = Head ϕ (mm)	5.0	5.80	7.00	8.00	10.00	12.00	
Recess Type	PZ-1	PZ-1	PZ-2	PZ-2	PZ-2	PZ-3	
UKF Code	PM2250/L	PM2300/L	PM2350/L	PM2400/L	PM2500/L	PM2600/L	
L = Length (mm)	5						
	6	•	•				
	8	•	•	•			
	10	•	•	•	•		
	12		•	•	•	•	•
	14						
	16		•		•	•	•
	18						
	20					•	•
	25						
	30						



FLANGE POZI



(PM3) POZI FLANGE Head PlasMASTER® -
30 Degree - Bright Zinc Plated - Gleitmo Waxed



D = Screw ϕ (mm)	2.5	3.0	3.5	4.0	5.0	6.0
A = Head ϕ (mm)	5.00	6.00	7.00	8.00	10.00	12.00
Recess Type	PZ-1	PZ-1	PZ-2	PZ-2	PZ-2	PZ-3
UKF Code	PM3250/L	PM3300/L	PM3350/L	PM3400/L	PM3500/L	PM3600/L
L = Length (mm)	5					
	6					
	8		•	•		
	10		•	•	•	
	12		•	•	•	•
	14			•		
	16		•	•	•	•
	18					•
	20					•
	25					
	30					

PAN TORX



(PM4) TORX PAN Head PlasMASTER® -
30 Degree - Bright Zinc Plated - Gleitmo Waxed



D = Screw ϕ (mm)	2.5	3.0	3.5	4.0	5.0	6.0
A = Head ϕ (mm)	4.40	5.30	6.10	7.00	8.80	10.50
Recess Type	T-8	T-10	T-10	T-20	T-25	T-25
UKF Code	PM4250/L	PM4300/L	PM4350/L	PM4400/L	PM4500/L	PM4600/L
L = Length (mm)	5					
	6					
	8	•	•	•	•	
	10	•	•	•	•	
	12	•	•	•	•	
	14					
	16					
	18					
	20					
	25					
	30					

COUNTERSUNK TORX

(PM5) TORX CSK Head PlasMASTER® -
30 Degree - Bright Zinc Plated - Gleitmo Waxed



D = Screw ϕ (mm)	2.5	3.0	3.5	4.0	5.0	6.0
A = Head ϕ (mm)	5.0	5.80	7.00	8.00	10.00	12.00
Recess Type	T-7	T-10	T-10	T-20	T-25	T-25
UKF Code	PM5250/L	PM5300/L	PM5350/L	PM5400/L	PM5500/L	PM5600/L
L = Length (mm)	5					
	6	•				
	8	•	•	•	•	
	10	•	•	•	•	
	12		•	•	•	
	14					
	16					
	18					
	20					
	25					
	30					


Guide to availability:

- Available from UK Fasteners extensive stock.
- Available to order - contact us for details.

The combination of a 30 degree thread angle and profiled thread root produce a screw with low installation torque and high stripping torque. Fully ROHS compliant the screws are Trivalent (Cr3) Zinc Plated and to aid installation the screws are also Gleitmo waxed.

Every care has been taken to ensure the product arrives to our customer on time and in perfect condition. So confident are we in the quality of our screws that they are clearly identified with the UK Fasteners head markings!


Contact us today to request samples and quotation for any of the ranges indicated above.

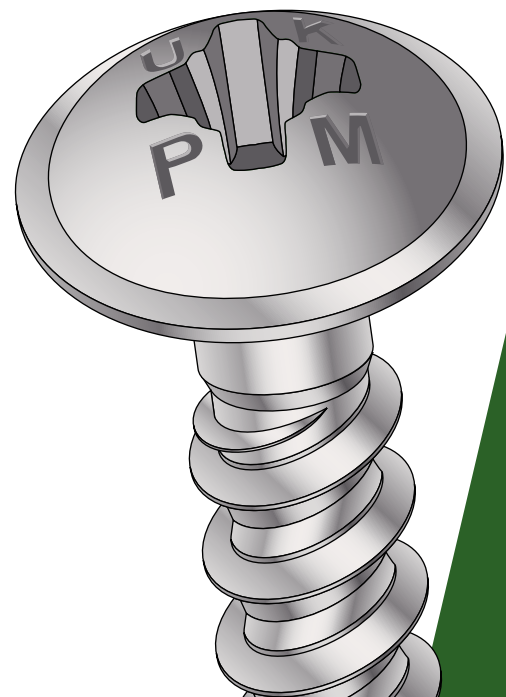

DOWN TO THE LAST DETAIL

SUPERIOR DESIGN

Unique head marking to enable clear identification before and after installation.

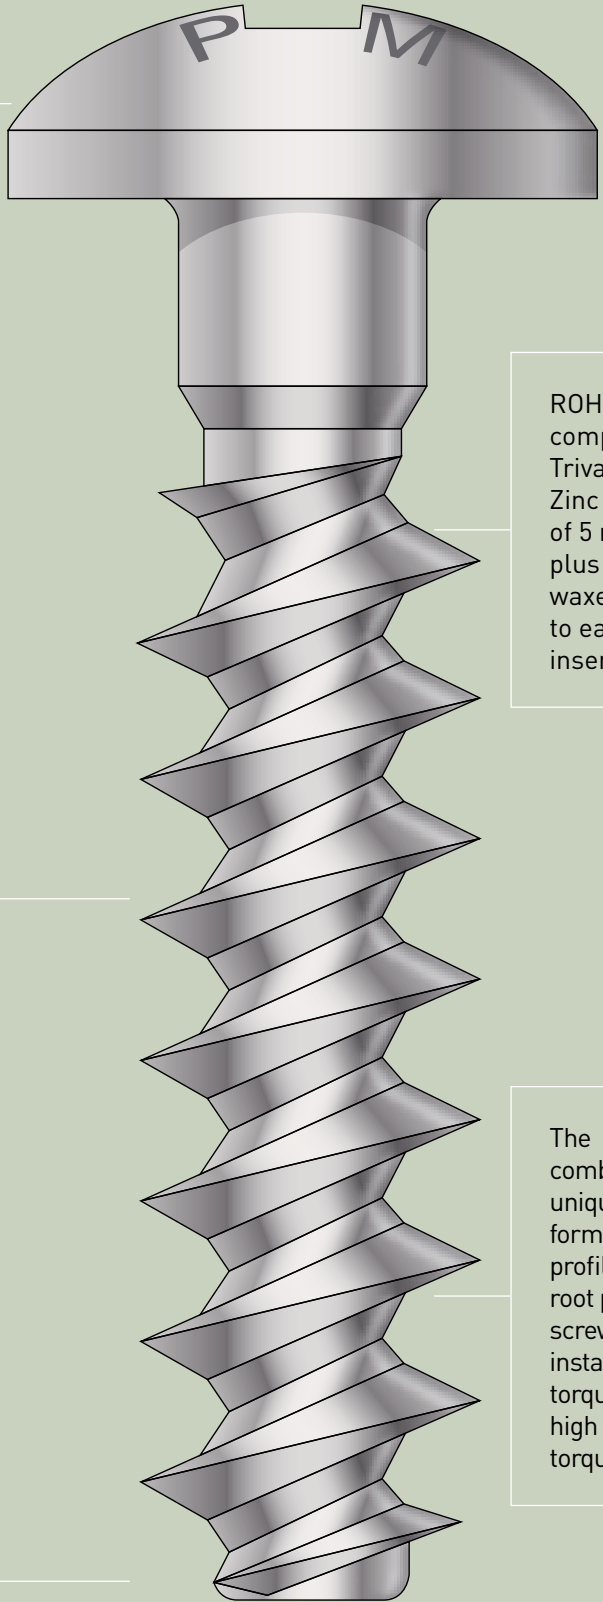

ROHS compliant Trivalent Zinc plating of 5 microns plus Gleitmo waxed to ease insertion.

Manufactured from C1022 carbon steel and surface hardened to HV450, with a core hardness to a maximum of HV390.

The combination of unique thread form and profiled thread root produce a screw with low installation torque and high stripping torque.

One thread lead-in to aid installation.

PERFORMANCE GUARANTEED



UK Fasteners
Part of Till & Whitehead Ltd

C1, Liddington Park, Leckhampton Road, Cheltenham, Gloucestershire GL53 0DL

Tel: 01242 577077 **Fax:** 01242 577078 **Email:** sales@ukfasteners.co.uk

Website: www.ukfasteners.co.uk

Reg Office: Bradley House, 66 Barrington Road, Altrincham WH14 1HY. Co Reg No. 46963

Distribution Branches for products within this catalogue are:

UK Fasteners Cheltenham 01242 577077

T&W Leeds 0113 249 6641

T&W Manchester 0161 827 3900

Handley & Beck Runcorn 01928 581200

F R Stubbs York 01904 427990